
FZ - PRINTED CIRCUIT MOUNT, LOW PROFILE POWER TRANSFORMER



- 1. Electrical Specifications
 - A. Maximum Power: 6VA
 - B. Input Voltage and Frequency: 115/230V @ 50/60Hz
 - C. Voltage Regulation: 21% TYP, Full Load to No Load
 - D. Temperature Rise: 30°CTYP
 - E. Insulation Resistance: < 1 MEG ohm
 - F. Hi-Pot: 1500 Vrms 1 minute
- 2. Agency Approval:

UL/cUL 5085-2 Recognized (File E47299) Insulation File No. E95662

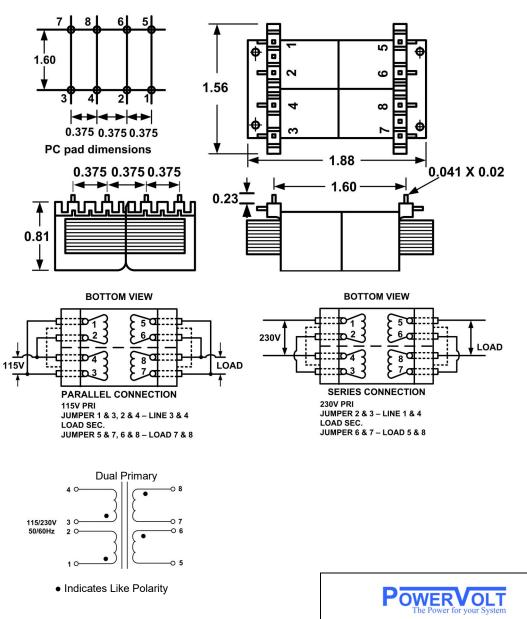

Part No.			
115/230V	Series Connection	Parallel Connection	
FZ 10-600	10VCT @ 0.600A	5V @ 1.20A	
FZ 12-450	12.6VCT @ 0.450A	6.3V @ 0.900A	
FZ 16-350	16VCT @ 0.350A	8V @ 0.700A	
FZ 20-300	20VCT @ 0.300A	10V @ 0.600A	
FZ 24-250	24VCT @ 0.250A	12V @ 0.500A	
FZ 30-200	30VCT @ 0.200A	15V @ 0.400A	
FZ 34-170	34VCT @ 0.170A	17V @ 0.340A	
FZ 40-150	40VCT @ 0.150A	20V @ 0.300A	
FZ 56-100	56VCT @ 0.100A	28V @ 0.200A	
FZ 88-65	88VCT @ 65MA	44V @ 130MA	
FZ 120-50	120VCT @ 50MA	60V @ 100MA	
FZ 230-25	230VCT @ 25MA	115V @ 50MA	
WEIGHT : 7 Oz.	·	·	

Power Volt The Power for your System	POWER TRANSFORMER	FZ 10)-XXX
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	Powervolt, Inc. 300 W Factory Road, Addison, IL -60101	Dim: Inches	Sheet 1 of
PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT POWERVOLT RETAINS THE EXCLUSIVE RIGHT OF DISSEMINA' FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PER	TION, MANUFACTURE AND SALE. THIS DRAWING, PRINT	OR DOCUMENT IS SUBMI	