
PP & DPP - CHASSIS MOUNT WITH QUICK-CONNECT TERMINALS POWER TRANSFORMER

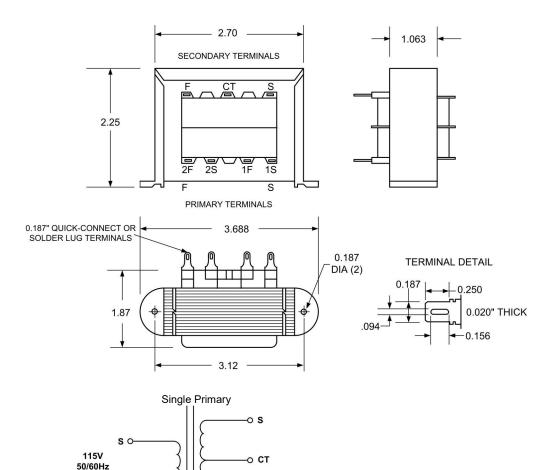

-0 F

-0 S

-о ст

ΟF

Dual Primary

FO

150

• Indicates Like Polarity

115/230V 1F O-

50/60Hz 2SO-

- 1. Electrical Specifications
 - A. Maximum Power: 56 VA
 - B. Input Voltage and Frequency: 115V & 115/230V @ 50/60Hz
 - C. Hi-Pot: 2500 Vrms 1 minute
- 2. Agency Approval:

UL/cUL 5085-2 Recognized (File E47299) Insulation File No. E95662



Part No.		
115V	115/230V	Secondary
PP-7-10	DPP-7-10	10VCT @ 5.0A
PP-7-12	DPP-7-12	12VCT @ 4.0A
PP-7-16	DPP-7-16	16VCT @ 3.5A
PP-7-20	DPP-7-20	20VCT @ 2.8A
PP-7-24	DPP-7-24	24VCT @ 2.4A
PP-7-28	DPP-7-28	28VCT @ 2.0A
PP-7-36	DPP-7-36	36VCT @ 1.5A
PP-7-48	DPP-7-48	48VCT @ 1.2A
PP-7-56	DPP-7-56	56VCT @ 1.0A
PP-7-120	DPP-7-120	120VCT @ 0.5A
WEIGHT : 1.70 Lbs	•	

Power for your System	POWER TRANSFORMER	PP-7-XXX DPP-7-XXX	
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	Powervolt Inc. 300 W Factory Road, Addison, IL –60101	Dim: Inches	Sheet 1 of 1
PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT WABASH TRANSFORMER RETAINS THE EXCLUSIVE RIGHT OF CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALON	DISSEMINATION, MANUFACTURE AND SALE. THIS DRAW	ING, PRINT OR DOCUM	ENT IS SUBMITTED IN